

**paul russells®**  
LED PANEL LIGHT



220V  
240V

50Hz  
60Hz



Life  
30000hrs

Max.  
45 °C  
Min.  
-10 °C




The luminaire shall, under no circumstance, be covered with thermal insulation matting or similar material.



If the external flexible cable or cord of this luminaire is damaged, it shall be exclusively replaced by the manufacturer or their service agent or a similarly qualified person in order to avoid a hazard.

The light source contained in this luminaire shall only be replaced by the manufacturer or their service agent or a similar qualified person.

Luminaire must not be used or stored in a corrosive environment where hazardous materials such as sulphur, chlorine, phthalates etc, are present.

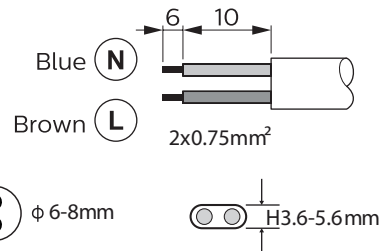

## A Visible Profile Ceiling mounting(VPC)

