

paul russells®

Slim LED Downlight




Code	Power	Dimension	Cut-out	CCT
18452	6W	ø117x27mm	ø88-100mm	3000K-4000K-6500K
18469	9W	ø141x26mm	ø113-126mm	3000K-4000K-6500K
18476	12W	ø172x26mm	ø140-155mm	3000K-4000K-6500K
18483	18W	ø216x26mm	ø179-195mm	3000K-4000K-6500K
18490	24W	ø295x27mm	ø255-274mm	3000K-4000K-6500K

Specifications

Input Voltage	Material	CRI	Colour	Class	IP	Beam Angle	Power Factor	Operaton Temp/ °C
220-240V~ 50/60Hz	PC	80	White	II	44	100°	0.7	-20~ + 40

WARNING

1. Switch off the power during installation.
2. Installation must be carried out by a qualified electrician or technician.
3. Turn on the switch only after completing the installation.

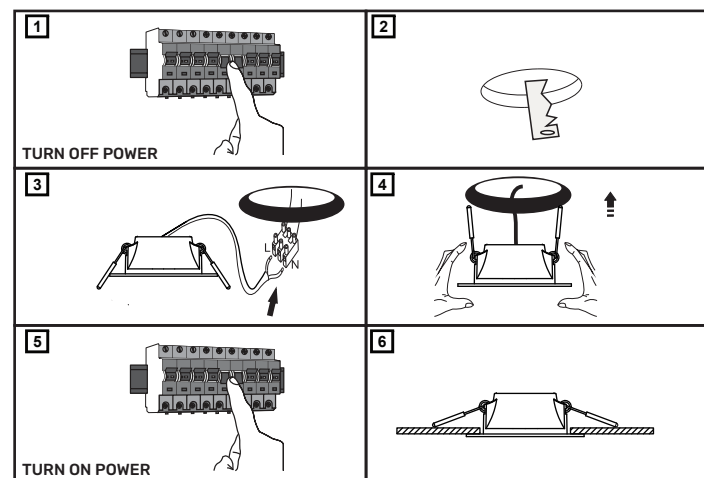

SAFETY INSTRUCTIONS

Please keep the following important instructions in mind for the safe use of the light: Modifying the light's structure is strictly prohibited. Keep it out of the reach of children. Take precautions during assembly to prevent damage. Ensure that no moisture enters the connection areas during maintenance. Recycle the product after its service life ends. Replace the entire luminaire when the light source reaches the end of its life.



This marking indicates that this product should not be disposed of with other household waste through out the UK and EU. To prevent potential harm to the environment or human health from uncontrolled waste disposal, please recycle it responsibly to encourage sustainable reuse of material resources.

www.paulrussells.com