



# LED BATTEN


High performance LED batten with Intelligent Press-Release Buttons




50000  
Hours




BESA  
BOX  
Compatible




Quick  
Connect  
Terminal



IK08



5  
YEAR  
warranty



IP20


Specification

CRI	80
Voltage	220-240V~ 50/60Hz
Efficacy (lm/W)	120
Ambient Temp	-20°C to 45°C


Colour Temp



Dimensions

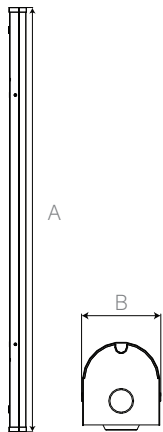

- Integrated LED driver
- Conduit entry on both ends
- Polycarbonate & Steel Construction
- Installation & User Manual

Energy Class: 

Order Code	Power	IP Rating	CCT	Lumen	Dimensions (A x B mm)	Qty/CTN
18544	82W	IP20	4000K	9840lm	1828x70	10